


ECSI International

SERIES 8500
INTEGRATED PERSONNEL & VEHICLE ENTRY CONTROL

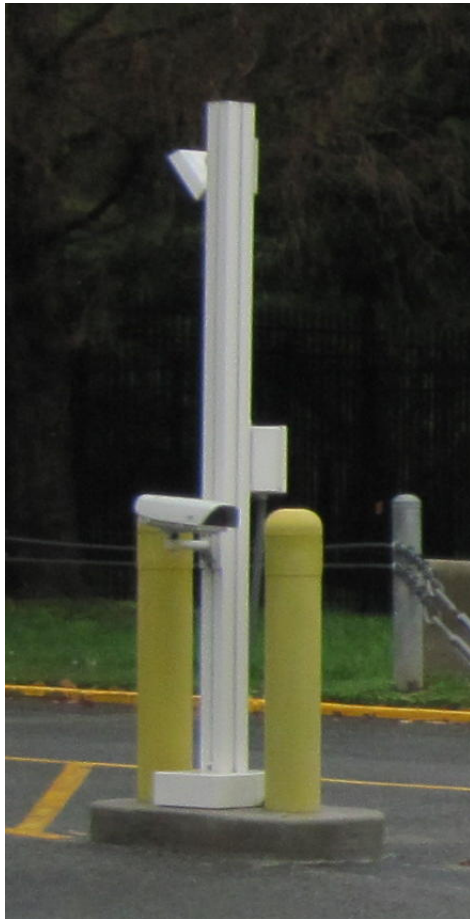

ENTRY CONTROL ELEMENT 9

Entry Control Element 9 allows personnel access in an automobile or motorcycle with a pre-approved vehicle tag identification. The Element includes a CCTV camera for video assessment and recording.

Camera Housing

Model: AXIS with heater and thermostat for network camera

Dimensions:

15.7" (400 mm) L x 6.9" (176 mm) W x 6.3" (159 mm) H

Weight:

6.6 lb (3 Kg)

Material:

Die-cast Aluminum; Sunshield ABS IP66

Power:

Pre-installed High PoE Midspan 1-Port

Temperature:

-4° to 122°F (-20° to 50°C)

Fixed Camera

Model: AXIS indoor/outdoor network camera

Dimensions:

5.1" (131mm) L x 3.5" (88mm) W

Weight:

0.55 lb (250 grams)

Power Consumption:

PoE IEEE 802.3af Class2

Temperature:

41° to 113°F (5 to 45°C)

Image Sensor:

¼" Progressive Scan RGB CCD

Illumination:

.75 lux, F1.0 Min; DC Iris

Lens

Type:

3.0 – 8.0 mm

F1.0

DC-Iris

CS Mount

Horizontal angle of view:

27° - 67°

RFID

Dimensions:

12.2" (310mm) x 9.8" (250mm) x 3.9" (100mm)

Weight:

9.9 lb (5kg)

Material:

Stainless steel (AISI304) Housing with ABS cover, IP65 (NEMA4X)

Power Consumption:

22-30 VDC @ 1Amp

<20Watt on DC

Temperature:

-22° to 140°F (-30 to +60°C)

Operation:

Frequency – 2.438 – 2.457 Ghz

Range up to 33Ft (10m)

Element Poles

Dimensions:

5" Sq x 108" H

Weight:

48.7 lbs

Material:

Aluminum 6063-T6 T-Slot extruded pole

Finish:

Choice of RAL 9010, 9011, or 8008 powder coat.

(Pure White, Graphite Black, and Olive Brown, respectively)

Contact:

ECSI International, Inc.
790 Bloomfield Avenue
Bldg. C-1, Clifton, NJ USA 07012
Tel: (973) 574-8555
Fax: (973) 574-8562
ecsi@ecsiinternational.com
www.ecsiinternational.com



ISO 9001:2008 Registered